

## **Genuine Accessories**

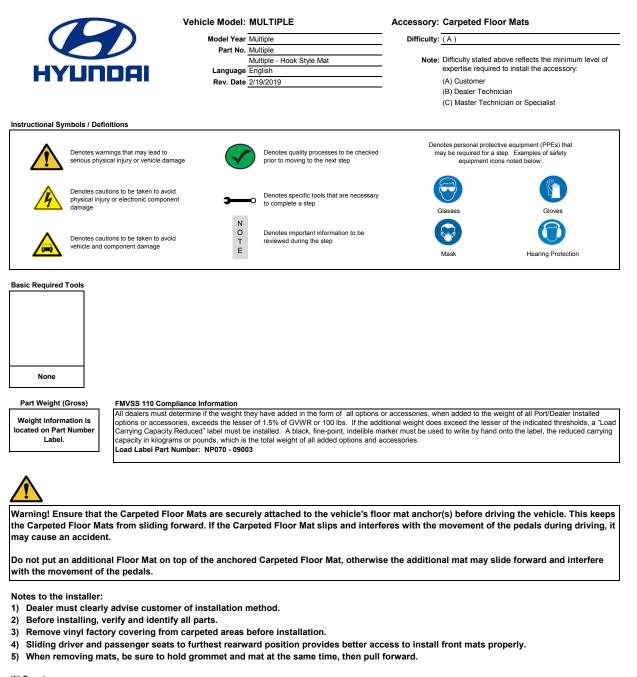

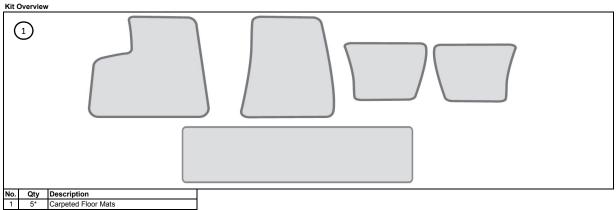

\* Shape and quantity of Carpeted Floor Mats will vary with each vehicle application.

1 =	
A. Install the driver side floor mat by aligning the plastic grommet(s) with the retent in the mat to align it with the retention hook. N O T E	ion hook(s) protruding from the vehicle floor. If necessary, rotate the grommet(s)
2 <b>3</b>	
NOTE: Some vehicles may not have rear retention hook(s) protruding from the vehicle floor.   N A. Place the Carpeted Floor Mat Grommet(s) over the vehicle Retention Hook(s) and push down to lock into place.   T B. Repeat steps 1 - 2 to install the passenger side front Carpeted Floor Mat.   C. If rear mats are included in the set, repeat steps 1 - 2 to install the second row and third row rear Floor Mat(s). Rear retention hooks are included on some models.	

Ensure each Floor Mat is securely fastened to the vehicle floor with each Retention Hook.