

# Genuine Accessories



**Vehicle Model:** Tucson  
**Model Year:** 2019~  
**Part No.:** D3F46 AK000  
**Language:** English  
**Rev. Date:** 7/25/2018

**Accessory:** Front Mudguards  
**Difficulty:** ( B )

**Note:** Difficulty stated above reflects the minimum level of expertise required to install the accessory:  
 (A) Customer  
 (B) Dealer Technician  
 (C) Master Technician or Specialist

### Instructional Symbols / Definitions

	Denotes warnings that may lead to serious physical injury or vehicle damage		Denotes quality processes to be checked prior to moving to the next step	Denotes personal protective equipment (PPEs) that may be required for a step. Examples of safety equipment icons noted below:	
	Denotes cautions to be taken to avoid physical injury or electronic component damage		Denotes specific tools that are necessary to complete a step		
	Denotes cautions to be taken to avoid vehicle and component damage	<b>N O T E</b>	Denotes important information to be reviewed during the step		
				Glasses	Gloves
				Mask	Hearing Protection

### Basic Required Tools



**Right Angle #2 Phillips Screwdriver**

### Part Weight (Gross)

<b>0.85</b>	lbs
<b>0.38</b>	kg

### FMVSS 110 Compliance Information

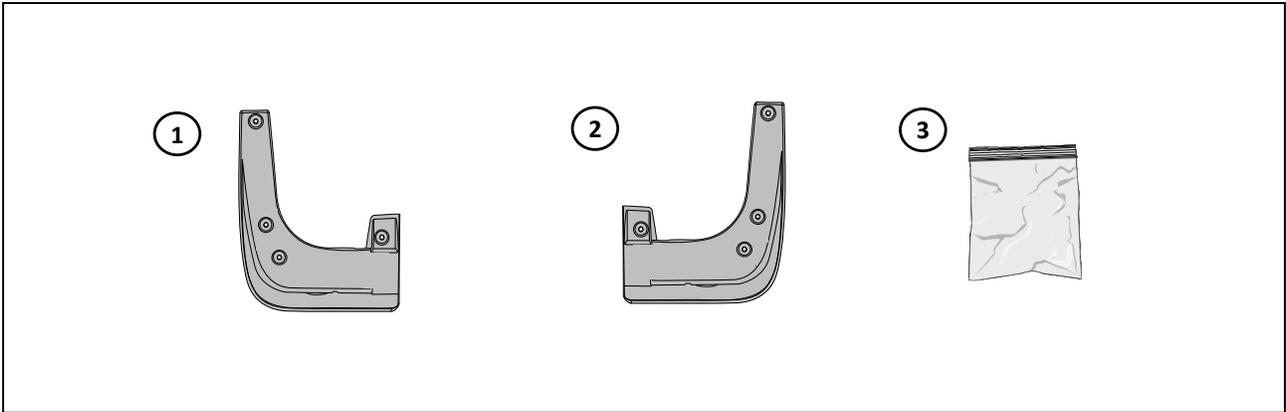
All dealers must determine if the Net weight they have added in the form of all options or accessories, when added to the weight of all Port/Dealer Installed options or accessories, exceeds the lesser of 1.5% of GVWR or 100 lbs. If the additional weight does exceed the lesser of the indicated thresholds, a "Load Carrying Capacity Reduced" label must be installed. A black, fine-point, indelible marker must be used to write by hand onto the label, the reduced carrying capacity in kilograms or pounds, which is the total weight of all added options and accessories.  
**Load Label Part Number: NP070 - 09003**

### Notes to the installer:

- 1) Read the entire Installation Instructions prior to beginning the installation of the part.
- 2) Make sure the vehicle is completely clean and dry in the area(s) the part is to be installed.
- 3) Ensure the vehicle is properly protected in the area(s) that the accessory is to be installed.
- 4) NEVER place tools on painted surfaces, seating surfaces, dash pad, console or floor carpet/mats.
- 5) Always wear appropriate personal protective equipment, including gloves, safety glasses, etc., when required.

# Genuine Accessories

## Kit Overview

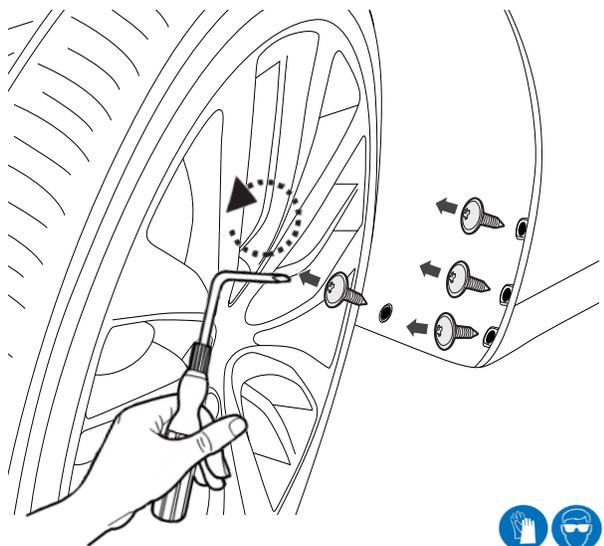


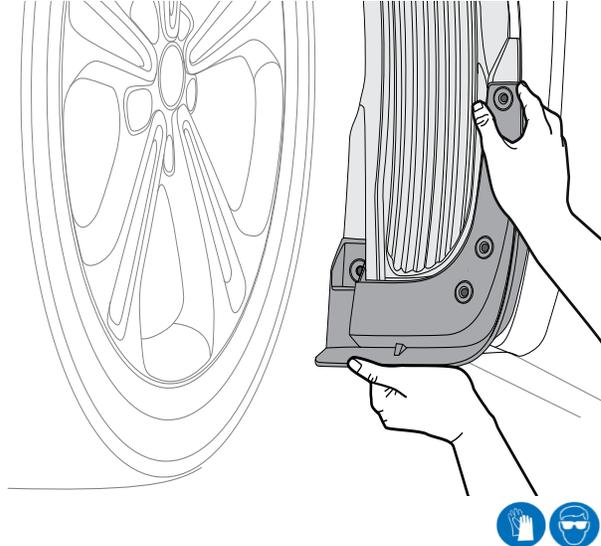
No.	Qty	Description
1	1	Front Mudguard LH
2	1	Front Mudguard RH
3	1	Hardware Bag

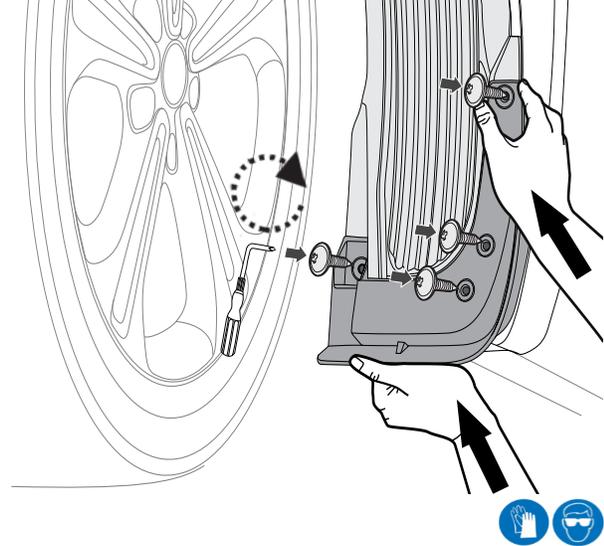
## Hardware Kit Contents

A	
8	Tapping Screw

Hardware Kit Total
8

1		Right Angle #2 Phillips Screwdriver
		
N O T E	<p><b>NOTE:</b> Fully turn the steering wheel to the left when installing the driver's side front mudguard (LH) and fully turn the steering wheel to the right when installing the passenger's side front mudguard (RH).</p> <p>A. Starting on the driver's side front wheel well area, remove the four (4) screws as shown.</p> <p>C. Discard the removed hardware.</p>	

2		
		
N O T E	<p>A. Align the driver's side front mudguard (LH) as shown ensuring a proper fit.</p>	
	<p>Make sure to push the mudguard upward and inward during the installation to eliminate any possible gaps.</p>	

3		Right Angle #2 Phillips Screwdriver
		
N O T E	<p>A. While pushing the mudguard upward and inward as shown, insert and fasten four (4) provided screws as shown.</p> <p>B. Repeat steps 1-3 for passenger's side front mudguard (RH).</p> <p>C. Installation is complete.</p>	
	<p>Check for any visible gaps. If any gaps exceed 0.5mm, loosen the mounting screws and refit the mudguard(s) to the body to decrease or eliminate the gaps. Be careful not to over-tighten or strip the screw head.</p>	

## Genuine Accessories

### Visual Check

	Item to be Checked		Result
	Make sure to push the Front Mudguards upward and inward during the installation to eliminate any possible gaps.		Front Mudguards are properly aligned.
	Check for any visible gaps. If any gaps exceed 0.5mm, loosen the mounting screws and refit the mudguard(s) to the body to decrease or eliminate the gaps.		Any visible gaps do not exceed 0.5mm.