

# Genuine Accessories



**Vehicle Model:** Palisade

**Model Year:** 2020~  
**Part No.:** S8F45 AK010  
**Language:** English  
**Rev. Date:** 2/28/2019

**Accessory:** Door Scuff Plates

**Difficulty:** ( A )

**Note:** Difficulty stated above reflects the minimum level of expertise required to install the accessory:  
 (A) Customer  
 (B) Dealer Technician  
 (C) Master Technician or Specialist

**Electronic Installation Instructions**

If this is a printed copy of the installation instructions, ensure you have the latest revision by scanning the QR code or by entering the website address listed below before beginning installation. Use the latest revision date as noted by "Rev. Date" above.

[www.hyundaiaccessories.com/admin\\_media\\_uploads/installationSheets/s8f45\\_ak010.pdf](http://www.hyundaiaccessories.com/admin_media_uploads/installationSheets/s8f45_ak010.pdf)

**Instructional Symbols / Definitions**

<p>Denotes warnings that may lead to serious physical injury or vehicle damage</p> <p>Denotes cautions to be taken to avoid physical injury or electronic component damage</p> <p>Denotes cautions to be taken to avoid vehicle and component damage</p>	<p>Denotes quality processes to be checked prior to moving to the next scuff</p> <p>Denotes specific tools that are necessary to complete a scuff</p> <div style="border: 1px solid black; padding: 2px; text-align: center; width: 20px; margin: 0 auto;">             N O T E         </div> <p>Denotes important information to be reviewed during the scuff</p>	<p>Denotes personal protective equipment (PPEs) that may be required for a scuff. Examples of safety equipment icons noted below:</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  Glasses             </div> <div style="text-align: center;">  Gloves             </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;">  Mask             </div> <div style="text-align: center;">  Hearing Protection             </div> </div>
--	---	--

**Basic Required Tools**

50/50 Isopropyl Alcohol (70%) & Water	Lint Free Cloth	Nylon Panel Removal Tool

**Part Weight (Gross)**

<b>1.08</b>	lbs
<b>0.49</b>	kg

**FMVSS 110 Compliance Information**

All dealers must determine if the Net weight they have added in the form of all options or accessories, when added to the weight of all Port/Dealer Installed options or accessories, exceeds the lesser of 1.5% of GVWR or 100 lbs. If the additional weight does exceed the lesser of the indicated thresholds, a "Load Carrying Capacity Reduced" label must be installed. A black, fine-point, indelible marker must be used to write by hand onto the label, the reduced carrying capacity in kilograms or pounds, which is the total weight of all added options and accessories.  
**Load Label Part Number: NP070 - 09003**

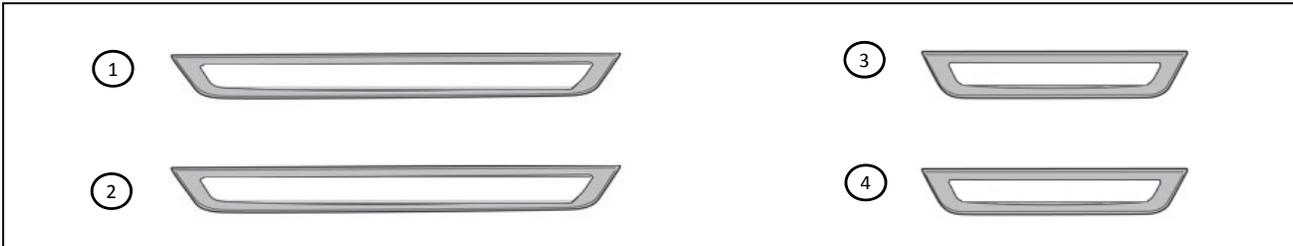
**Part Weight (Net)**

<b>0.38</b>	lbs
<b>0.17</b>	kg

**Notes to the installer:**

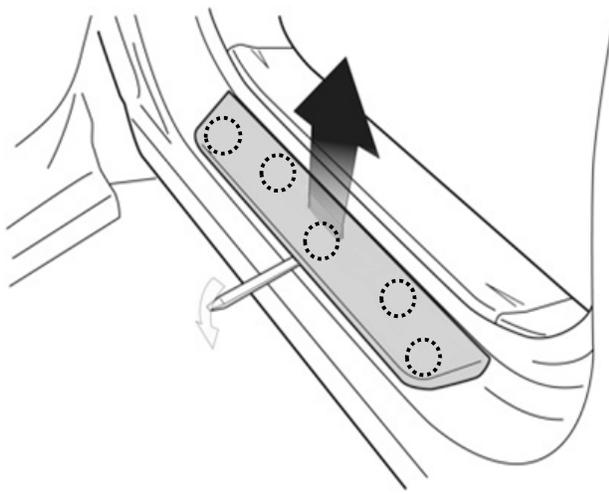
- 1) Read the entire Installation Instructions prior to beginning the installation of the part.
- 2) Make sure the vehicle is completely clean and dry in the area(s) the part is to be installed.
- 3) Ensure the vehicle is properly protected in the area(s) that the accessory is to be installed.
- 4) NEVER place tools on painted surfaces, seating surfaces, dash pad, console or floor carpet/mats.
- 5) Always wear appropriate personal protective equipment, including gloves, safety glasses, etc., when required.

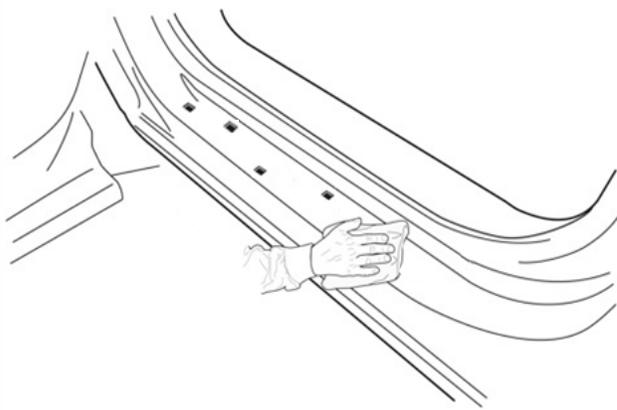
**Kit Overview**

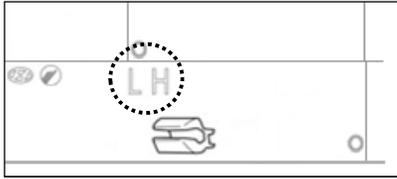


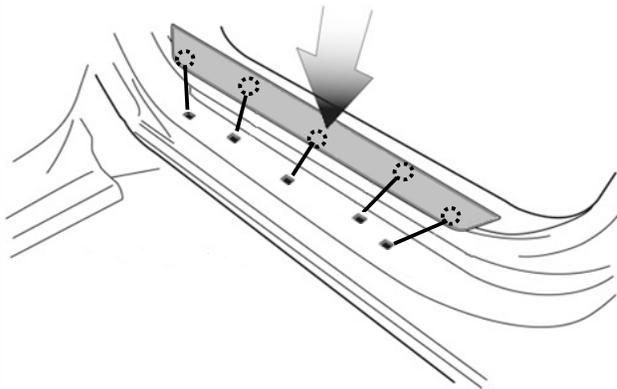
No.	Qty	Description
1	1	Driver Side Front Scuff Plate (Long, LH on back)
2	1	Passenger Side Front Scuff Plate (Long, RH on back)
3	1	Driver Side Rear Scuff Plate (Short, LH on back)
4	1	Passenger Side Rear Scuff Plate (Short, RH on back)

# Genuine Accessories

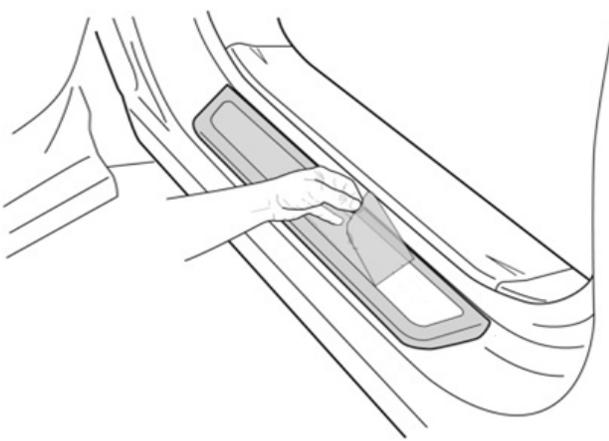
1		Nylon Panel Removal Tool and Lint Free Cloth
		
N O T E	<p>A. Gently dislodge the weatherstrip along the left front (LF) driver side factory door scuff plate.</p> <p>B. Using a Nylon Panel Removal Tool wrapped with a Cloth to prevent scratches to the vehicle, gently pry up to disengage the five (5) retention clips of the left front (LF) driver side factory door scuff plate and remove from the side panel of the vehicle.</p> <p>C. Discard the factory door scuff plate.</p>	
	<p><b>Do not scratch or damage the side panel when removing the factory door scuff plate.</b></p>	

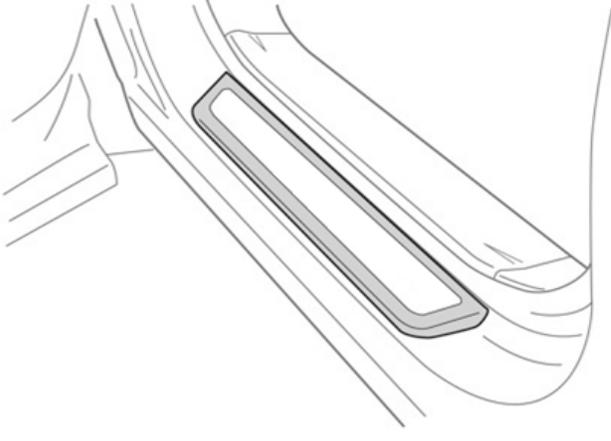
2		50/50 Isopropyl Alcohol (70%) & Water and Lint Free Cloth
		
N O T E	<p>A. Using 50/50 Isopropyl Alcohol (70%) &amp; Water and a lint free cloth, thoroughly clean the side panel as shown.</p>	

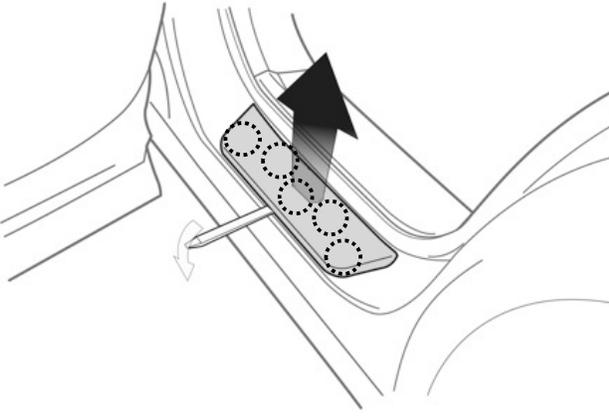
3		
		
N O T E	<p>A. Identify the Driver Side Front Scuff Plate (Long, LH on back) by the "LH" marking indicated on the backside as shown.</p>	
	<p><b>Make sure to correctly identify the correct door scuff plate.</b></p>	

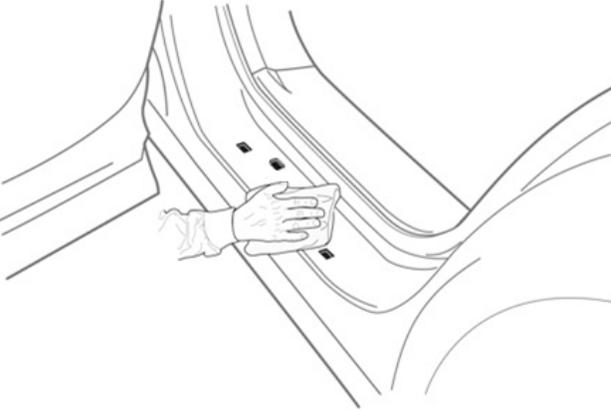
4		
		
N O T E	<p>A. Align the five (5) retention clips of the Driver Side Front Scuff Plate to the five (5) clip holes of the vehicle side panel as shown.</p> <p>B. Gently apply downward pressure on each of the five (5) clip locations to securely fasten the front door scuff plate to the vehicle.</p> <p>C. Reinstall the weatherstrip back into position ensuring there are no kinks.</p>	
	<p><b>Make sure all clips on the front door scuff plate are fully inserted into the clip holes of the vehicle side panel.</b></p>	

# Genuine Accessories


5		
		
N O T E	<p>A. Peel the protective film away from the Driver Side Front Scuff Plate as shown.</p> <p>B. Discard the protective film.</p>	
	Do not scratch, bend, or damage the door scuff plate.	

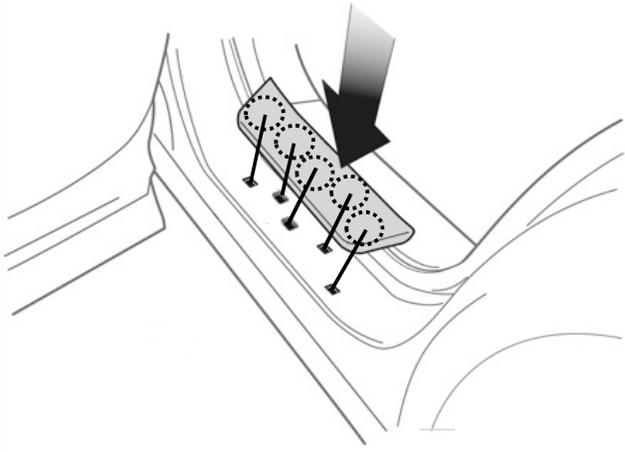
6		50/50 Isopropyl Alcohol (70%) & Water and Lint Free Cloth
		
N O T E	<p>A. Using 50/50 Isopropyl Alcohol (70%) &amp; Water and a lint free cloth, thoroughly clean the Driver Side Front Scuff Plate.</p> <p>B. Installation of the Driver Side Front Scuff Plate is complete.</p> <p>C. Repeat steps 1-6 for the Passenger Side Front Scuff Plate (Long, RH on back) on the right front (RF) side of the vehicle.</p>	
	Do not scratch, bend, or damage the door scuff plate.	

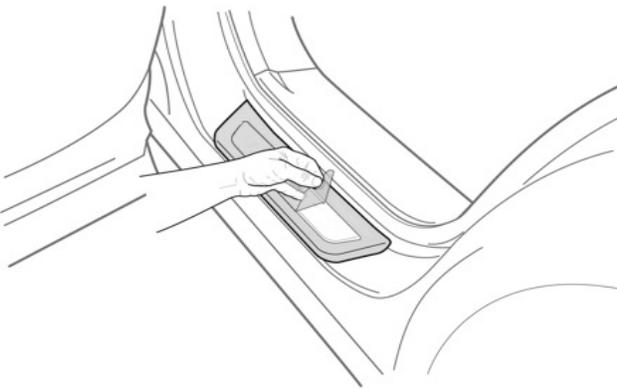
7		Nylon Panel Removal Tool and Lint Free Cloth
		
N O T E	<p>A. Gently dislodge the weatherstrip along the left rear (LR) driver side factory door sill plate.</p> <p>B. Using a Nylon Panel Removal Tool wrapped with a Cloth to prevent scratches to the vehicle, gently pull up to disengage the five (5) retention clips of the left rear (LR) driver side factory door sill plate and remove from the side panel of the vehicle.</p> <p>C. Discard the factory door sill plate.</p>	
	Do not scratch or damage the side panel when removing the factory door scuff plate.	

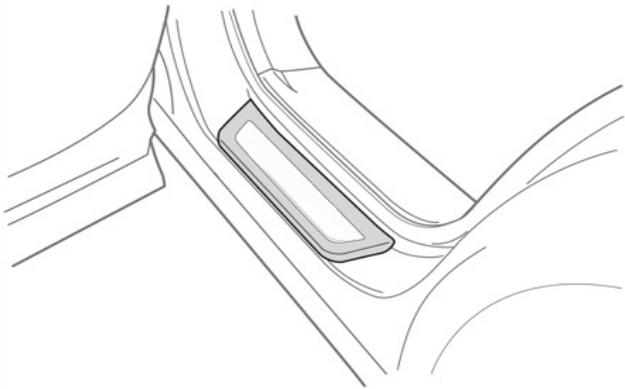
8		50/50 Isopropyl Alcohol (70%) & Water and Lint Free Cloth
		
N O T E	<p>A. Using 50/50 Isopropyl Alcohol (70%) &amp; Water and a lint free cloth, thoroughly clean the side panel as shown.</p>	

# Genuine Accessories

9		
		
N O T E	<p>A. Identify the Driver Side Rear Scuff Plate (Short, LH on back) by the "LH" marking indicated on the backside as shown.</p>	
	<p><b>Make sure to correctly identify the correct door scuff plate.</b></p>	

10		
		
N O T E	<p>A. Align the five (5) clips of the Driver Side Rear Scuff Plate (Short, LH on back) to the five (5) left rear (LR) clip holes of the vehicle side panel as shown.          B. Gently push down on each of the five (5) clip locations to securely fasten the door scuff plate to the vehicle.          C. Reinstall the weatherstrip back into position ensuring there are no kinks.</p>	
	<p><b>Make sure all clips on the door scuff plate are fully inserted into the clip holes of the vehicle side panel.</b></p>	

11		
		
N O T E	<p>A. Peel the protective film away from the Driver Side Rear Scuff Plate as shown.          B. Discard the protective film.</p>	
	<p><b>Do not scratch, bend, or damage the door scuff plate.</b></p>	

12		50/50 Isopropyl Alcohol (70%) & Water and Lint Free Cloth
		
N O T E	<p>A. Using 50/50 Isopropyl Alcohol (70%) &amp; Water and a lint free cloth, thoroughly clean the Driver Side Rear Scuff Plate.          B. Installation of the rear door scuff plate is complete.          C. Repeat steps 7-12 for the Passenger Side Rear Scuff Plate (Short, RH on back) on the right rear (RR) side of the vehicle.</p>	
	<p><b>Do not scratch, bend, or damage the door scuff plate.</b></p>	

# Genuine Accessories

**Visual Check**

Item to be Checked		Result	
	Door scuff plates are firmly attached to vehicle.	Door scuff plate retention clips are fully inserted into clip holes of vehicle side panel.	
	Protective film is removed from door scuff plates.	Film removed.	
	Door scuff plates are free from adhesive and dirt.	Door scuff plates are clean.	
	Weatherstrip is in place, no kinks.	Weatherstrip correctly installed.	